




Switched Socket Outlet

PRODUCT SPECIFICATIONS

13A SWITCHED SOCKET OUTLET

13A SWITCHED SOCKET OUTLET WITH NEON INDICATOR

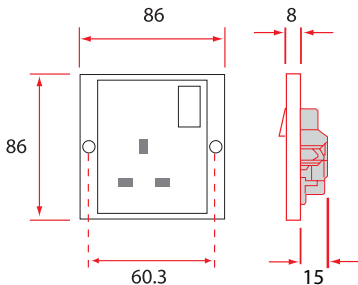

<b>General Data</b>	
Standard Compliance	SLS 734
Warranty	Lifetime
<b>Technical Data</b>	
Key Features	Front plate is covered with wooden finishing formica layer
	The inner plate and back housing made from polycarbonate is of high impact strength and has fire retardant properties
	Red indicator gives clear ON indication for Neon socket outlets
	Embossed terminal markings on the rear housing ensures terminal identification and save wiring time
	Internal contact points covered with silver coating enhances the electric strength of the switch
	Safety shutter operated from earth pin ensures that the earth terminal makes the contact first and breaks last, thereby providing maximum safety
	Alignment tolerance of mounting screw holes
<b>Power Supply</b>	
Rated Voltage	250V AC
Rated Current	13A
<b>Dimensions</b>	
Steel Plate Size (H*W)	86mm x 86mm
Front Frame Size (H*W)	86mm x 86mm
Terminal Space Capacities	L/N Terminal - 2 x 2.5mm <sup>2</sup> , E Terminal - 2 x 2.5mm <sup>2</sup>
Depth	15mm
Mounting Centers	60.3mm
Compatible Sunk Box	Standard Sunk Box (Depth - 35mm)
<b>Performance Parameters</b>	
Electrical Endurance	15000 cycles (30000 Movements)
<b>Material Overview</b>	
Plastic	Polycarbonate and Nylon-FR grade
Metal	Brass, Phosphor Bronze, Insulated steel plate, Silver on the contact points
Product Category	Mahogany, Kumbuk, Teak Finishing